


ZIPPY BAGGER XL

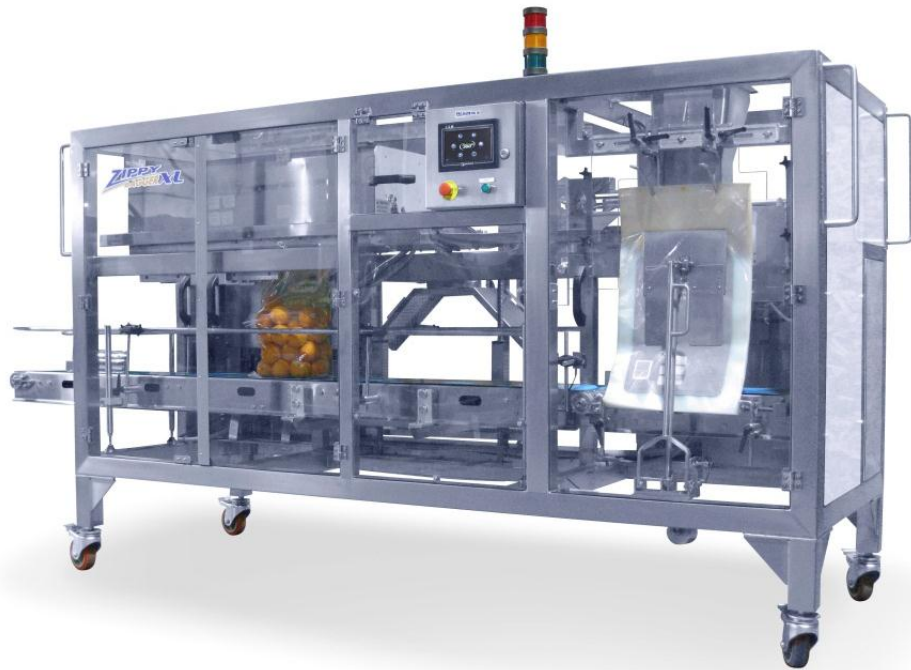

Benefits and Advantages

- A small footprint and low height make the Zippy Bagger® XL easy to load product.
- Height adjustable conveyerized bag support for various bag lengths.
- Wide bag wide specs versatility.
- The Zippy Bagger XL operated with the use of pre-made wicketed bags and will automatically open and seal the bag after filling.
- The Zippy Bagger XL can run both laminated and polyethylene materials as well as stand up bags and are available in Left to Right or Right to Left versions.
- Touch screen controls make the Zippy Bagger XL very user friendly.

ZIPPY BAGGER XL



Features

- Fully adjustable wicket assembly
- Right to left bag transfer
- No bag - no fill control
- Pre-wired filler interface connections
- Air amplifier, regulator, lubricator and filter
- Fully adjustable bag-clamping device
- Horizontal linear shaft support mechanism
- Stainless steel / anodized aluminum construction with water-tight control box
- Four pivoting casters with locks
- Hinged top with locking mechanism & Plexiglas window
- 1/4" seal width
- Rotary trim knife
- Adjustable angle grip fingers
- Six foot (518 mm) bag carrying conveyor
- Tilting seal head assembly for easy service
- Digital temperature control

Specifications

Electrical

- North American 110 VAC / 1 Ph / 60 Hz
- International 240 VAC / 1 Ph / 50 Hz
- All other electrical specifications available on request at additional cost

Air

- North American 12 CFM / 90 PSI
- International 360 L / min / 6 bar

Bag Widths

- 10 to 20 inches (260 - 500 mm)

Bag Lengths

- 10 to 24 inches (260 - 600 mm)