

WEILER® 16VSC VERTICAL SCREW CONVEYOR VERSATILE. VERTICAL. VALUABLE.



PRO VISUR

FEATURES

- CE compliant
- Polished food contact surfaces minimize raw material smearing and lean/fat separation
- Hopper is guarded for operator safety
- Hopper guard and vertical trough cover are interlocked for safe operation and safe sanitation
- Hopper rolls back from vertical screw for easy sanitation
- Removable seals facilitate sanitation and maintenance
- NEMA 4x enclosure with start/stop/clean/e-stop push button box is included (starter not included)
- Clean-mode facilitates a safe and reliable method to rotate screws for sanitation

RAW MATERIAL

- Ground fresh and frozen materials
- Whole trim and chunks
- Pre-broken frozen



Hopper guard and safety labels removed for clarity. All guards and labels must be in place while operating.



Polished food contact surfaces

WEILER® 16VSC VERTICAL SCREW CONVEYOR SPECIFICATIONS

DRIVE: Hopper – 10 HP (7.5 kw); Vertical Screw – 10 HP (7.5 kw)

CONSTRUCTION: 304 stainless steel with polished food contact surfaces


SCREW DIAMETER: 16 in. (400)

CASTERS: 4 in. (102) swivel caster, with brake

WEIGHT: Unskidded – 1250 lbs (567 kg); Skidded – 1600 lbs (726 kg)

DIMENSIONS inches (mm)							
A	В	C	D	E	F	G	Н
177-1/2 (4509)	44-7/16 (1129)	103-1/8 (2620)	135-1/4 (3435)	36-3/4 (933)	54-7/16 (1383)	40-7/8 (1038)	17 (432)

Note: Certified drawings are available for installation purposes.

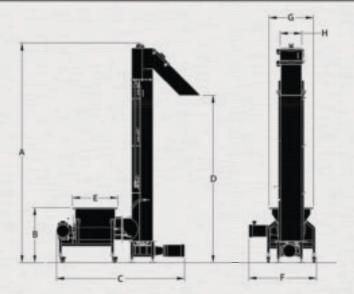

WE PUT IT ALL ON THE LINE.



Provisur™ Technologies, Inc.

1116 East Main Street, Whitewater, Wisconsin 53190 USA

USA: 262-473-5254 800-558-9507 weilerinfo@provisur.com Europe: +44 (0) 1454 320900 weilerinfo@provisur.co.uk www.weilerinc.com www.provisur.com